

Fuseholders And Accessories

Sec. 12



12592
Nylon

Glass Tube Fusepuller

UNIT PACKAGE: 1



Not Actual Size

12079
Nylon

Moulded In-Line Fuse Holder
with 8" of 18 Ga. Wire

Use with Auveco 1/4" x 1-1/4" Glass Tube Fuses
up to and including 20 Amps.

UNIT PACKAGE: 3




Not Actual Size

11618
Nylon

Fuse Assembly
With 30 Amp Fuse Included
12 Gauge Wire

UNIT PACKAGE: 5




Not Actual Size

18103

Tests ATO (Blade Type) and Mini-Fuses.
Now you can make sure the fuse is good before
installing it. Also functions as a fuse puller.
40 Amp maximum

UNIT PACKAGE: 1

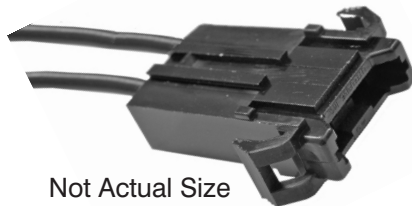


Not Actual Size

12359

In-Line Fuse Holder

Accommodates all ATO/ATC
fuses from 3-30 Amps
Heavy Duty Hard Shell Construction
10" Loop of 14 Gauge Wire

UNIT PACKAGE: 3

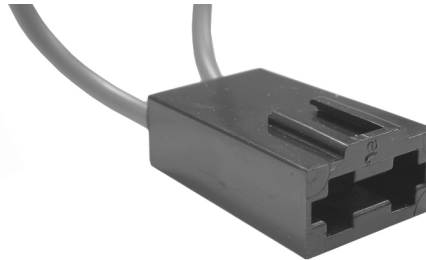

14055

In-Line Fuse Holder

Accommodates all ATO/ATC
fuses from 3-30 Amps
Heavy Duty Hard Shell Construction
10" Loop of 12 Ga. Wire

UNIT PACKAGE: 3



12363

In-Line Fuse Holder

Accommodates all ATO/ATC
fuses from 3 thru 20 Amps.
Comes with two 4" 16 Ga.
Wire Leads.

UNIT PACKAGE: 5



Not Actual Size


20789

In-Line Mini Fuse Fuseholder
30 Amp Maximum
12 Ga. Wire
Use With Auveco Mini Fuses
16351 - 16360


Replaces Auveco 17648
Fuse Not Included

UNIT PACKAGE: 3

Self-Stripping Fuseholder



12977

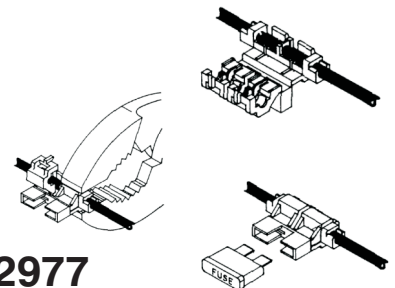

Mates with most plug-in blade type fuses found in
late-model domestic and some import cars. For 18-14
gauge copper wire.

32 volts maximum.

20 amp maximum with 14 gauge wire.

10 amp maximum with 16 gauge wire.

7.5 amp maximum with 18 gauge wire.

UNIT PACKAGE: 5