



Aluminum Oxide Resin Bonded Cut-Off Wheels

Sec. 28



Designed for steel cutting use only. Never use these wheels for any other applications.
Never Use On Fiberglass!



| Auveco Part No | | SPECIFICATIONS | | | | |
|-------------------|-----------------|----------------|-----------|-------|------|--------|
| Unit Pkg. 10 | Unit Pkg. 25 | Dia. | Thickness | Arbor | Grit | RPM |
| 19688 | 19687 | 3" | 1/16" | 3/8" | 54 | 25,000 |
| 19690 | 19689 | 3" | 1/32" | 3/8" | 54 | 25,000 |
| 19692 | 19691 | 3" | 1/16" | 1/4" | 54 | 25,000 |
| 19694 | 19693 | 3" | 1/32" | 1/4" | 54 | 25,000 |
| 19696 | 19695 | 3" | 1/8" | 1/4" | 46 | 25,000 |
| 19698 | 19697 | 3" | 1/8" | 3/8" | 46 | 25,000 |
| 19702 | 19701 | 4" | 1/32" | 3/8" | 60 | 21,000 |
| 19706 | 19705 | 4" | 1/16" | 3/8" | 54 | 21,000 |
| 19708 | 19707 | 4" | 1/8" | 3/8" | 46 | 15,300 |



General Purpose Depressed Center Wheels

TYPE 27 Standard Shape

The most popular Raised Hub wheel for grinding and blending


CAUTION!

Never Use A Wheel That Has Been Dropped

- Always Wear Full Face Protection When Grinding
- Use A Guard Covering 50% Or More Of Wheel Diameter

| Auveco Part No | | SPECIFICATIONS | | | | |
|-------------------|-----------------|----------------|-------|-------|------|--------|
| Unit Pkg. 10 | Unit Pkg. 25 | Dia. | Width | Arbor | Grit | RPM |
| 19712 | 19711 | 4" | 1/4" | 5/8" | 36 | 13,700 |
| 19714 | 19713 | 4-1/2" | 1/4" | 7/8" | 24 | 11,900 |

Cut-Off Wheel Mandrels (Arbors For Air Grinders)

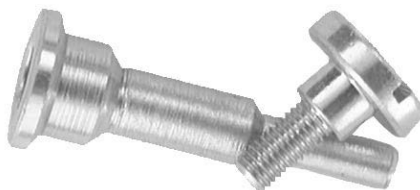

19715
Zinc

Mandrel With
3/8" Shoulder Screw

UNIT PACKAGE: 1

Not Actual Size



19716
Zinc

Mandrel With
1/4" & 3/8" Shoulder Screws

UNIT PACKAGE: 1

Welding Blanket



21083

A 6 ft. x 6 ft. lightweight, welding blanket to protect from the spray of sparks, spatter and slag. Our fire and heat resistant welding blankets are made with a carbon fiber fabric that was developed from NASA technologies. The carbon fibers can withstand temperatures of 1800 F from contact with hot metal, for short durations but should not be exposed to temperatures of 200 F for extended periods. The blankets are easy to clean; just shake, vacuum or use compressed air to blow metal particles out.

UNIT PACKAGE: 1